

SINGLE ACTING TELESCOPIC CYLINDERS



LARZEP advantages

- Capacity from 10 to 30 Tn, stroke up to 600 mm.
- For applications with minimum clearance and high lift required.
- Load return.
- Double acting DL, aluminium double acting DLA and aluminium single acting SLA available as special.




Low Height Single Acting Telescopic Cylinders, SLX.

Capacity	Model	1 st Stage			2 nd Stage			
		Capacity	Stroke	Area	Capacity	Stroke	Area	
Tn		kN	mm	cm ²	kN	mm	cm ²	
10	SL01027	303	135	44	109	270	16	
	SL01043	652	145	95	303	290	44	
15	SL01530	436	150	64	163	300	24	
	SL01550	842	170	123	463	340	64	
30	SL03030	652	150	95	303	300	44	
	SL03060	1.380	200	201	652	400	95	



Double Acting Telescopic Cylinder, DLA.

TELESCOPIC CYLINDERS




SL

10-30 Tn.

700 bar

CYLINDERS

Larzep designs and manufactures special cylinders upon request.

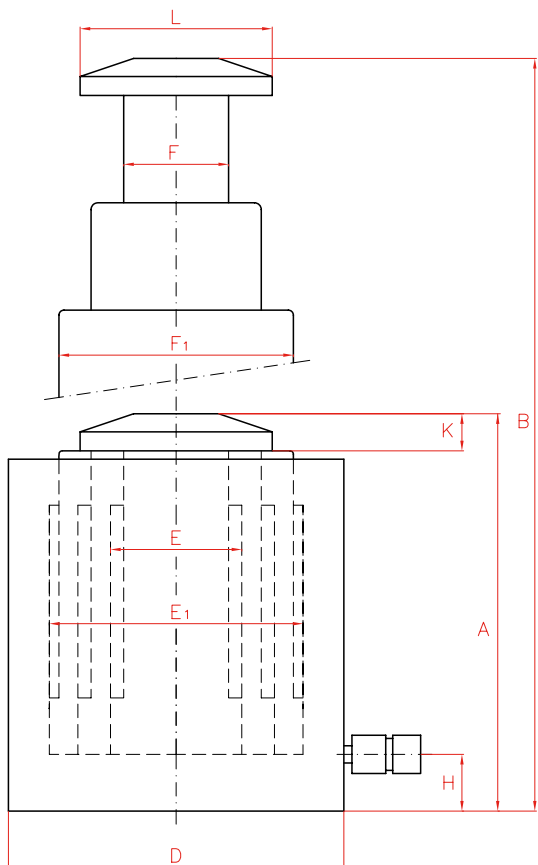

Telescopic Aluminium Cylinders, DLA.



Coupler 3/8\"-18 NPT included.

Page. 108

	3 rd Stage			Model	Oil Cap.	A	B	D	E	E1	F	F1	H	K	L	Weight
	Capacity	Stroke	Area	LARZEP												
	kN	mm	cm ²		cm ³	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
-	-	-	-	SL01027	810	250	520	110	45	75	36	68	20	16	50	16,2
109	435	16		SL01043	2.250	280	715	152	45	110	36	95	21	19	75	33,4
-	-	-	-	SL01530	1.308	280	580	125	55	90	50	80	25	16	66	23,4
163	500	24		SL01550	3.543	320	820	175	55	125	50	110	25	19	95	50,9
-	-	-	-	SL03030	2.088	304	604	152	75	110	68	100	27	18	89	38,3
303	600	44		SL03060	6.803	366	966	220	75	160	68	150	27	20	123	96,2