

WEDGE SPREADER



WEDGE SPREADER


Type **CY**

Capacity **15 Tn**


Max. pressure **700 bar**



- ✓ 15 Tn capacity wedge spreader.
- ✓ Lightweight and ergonomic tool. Easy and quick maintenance.
- ✓ Specially designed for pipe and flange repair and maintenance.
Can be used also for seal replacement, removing elbows or heavy equipment maintenance.
- ✓ Required access gap of only 5 mm.
- ✓ Suitable for harsh offshore environment due to corrosion protection.
- ✓ Recommended to be used in pairs.
- ✓ Options: Aluminium Safety block CY15B; Handle CY15H; Kit CY1501S, with pump and 2 wedge spread

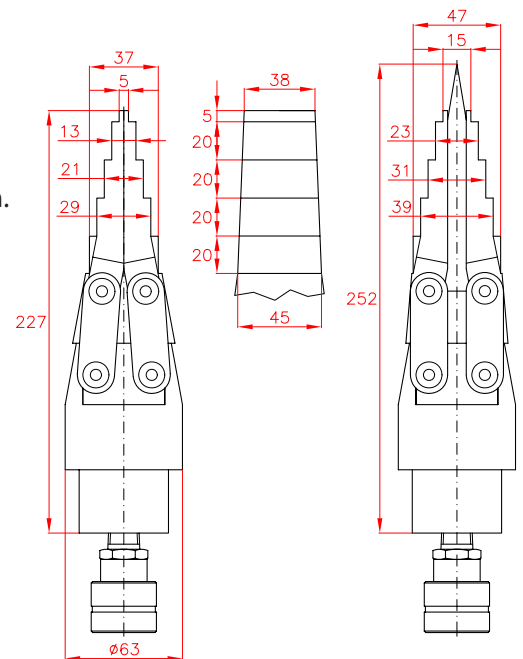

Aluminium Safety Block CY15B as option.

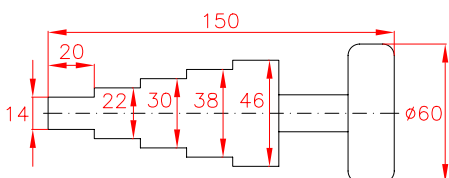

Capacity	Model	Oil Capacity	Access Gap	Max. open width	Weight
Tn	LARZEP	cm ³	mm	mm	kg
15	CY1501	16	5	47	3,2



Always read the safety instructions.