


- V Powered by a gasoline engine. For operation in remote locations where electric supply is not available.
- $\checkmark$  The manual control valve is easily converted from double acting to single acting operation.
- Internal safety valve set at 700 bar to prevent overpressure.
- External adjustable pressure relief valve.
- Roll bar and wheel kits available as options on request.

Capacity	Α	В	С	
- 1	mm	mm	mm	
14	368	290	665	
25	450	325	760	
50	540	415	860	

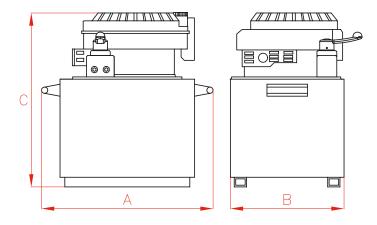

Tank	Flow at 700 bar	Flow at 60 bar	Valve Function	Single/A	Double/A	Power	Weight
1	l/min	l/min				kW	kg
14	0,36	4	Advance-Hold-Retract	HAG742	HAG744	3,6	36
25	0,36	4	Advance-Hold-Retract	HAG752	HAG754	3,6	60
50	0,36	4	Advance-Hold-Retract	HAG762	HAG764	3,6	93